

System variants

VM/EM




VDS



PE



PES

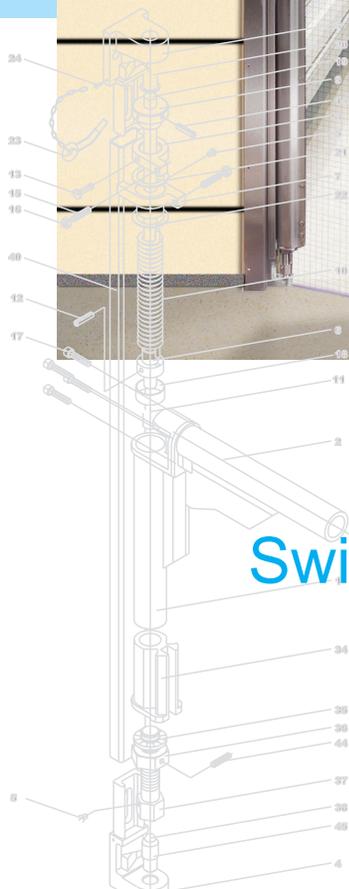

VM/EM
Swing doors for the industry
for the movement of persons

The moderately heavy design

That's where you score:

for maximum doorways and wings of the door up to 3,000 mm wide.

- flexible door leaf
- one or more wings
- classic and timeless construction of a door



This variation of a swing door is used as a separation in salesrooms, in public passages, cold-store and deep-freeze rooms. The combination of tubing course top pieces, strip curtains and in connection with deep-freeze doors offers multiple variants.




Break-stop-segments GX as tearing protection




Automation pneumatically or electrically



Impact protection on both sides to protect door leaf



Magnetic lock with bracket





Decide yourself:

By choosing from these options you will get a tailor-made product for your individual needs meeting your standards in terms of economical and qualitative applications.



Rectangular tube for door case 40/20 with integrated upper and lower bearing points. Fixed to wall laterally. Design in galvanized or stainless steel.

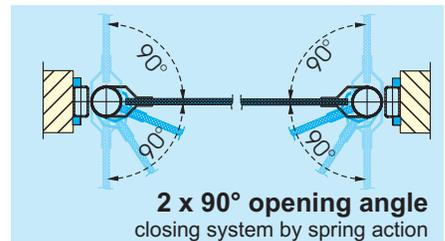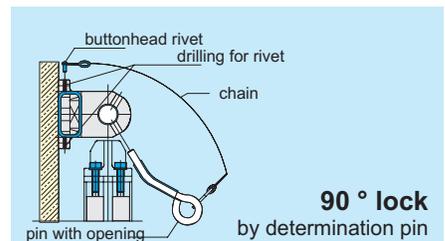

Swing door panels PTK 35 highly transparent or combined with blue, red and black. Thickness 5, 7 and 10 mm. Excellent transparency, highly abrasion resistant, age- and UV-resistant, high breaking strength in coldness, standard quality up to -30°C, low-temperature proof up to -45°C.

Transnetz in thickness 7 and 10 mm, with wide-meshed, tearproof reinforced glass fibre fabric for daily hard wear. Highly abrasion resistant, age- and UV-resistant, standard quality up to -30°C, low-temperature proof.

