

In a world full of options, we
always deliver the best solution

MODULAR COLD ROOMS & CASES



INDEX



MT MOD BOXES
Modular Cold Rooms
PAGE 2



ACCESSORIES
PAGE 10



MT MOD CASES
Modular Cases &
Sectional Cabinets
PAGE 6



**REFRIGERATION
SYSTEMS**
PAGE 11


MODULAR COLD ROOMS • FEATURES

PANELS



Sandwich panels consisting of rigid polyurethane foam (PUR) inside 2 metal sheets. Prepainted galvanised steel sheet with 30 microns of paint, with colour RAL 9010, non toxic with temporary protective film.

Reaction to fire, B-s3, d0, according to European standard EN 13501-1 corresponding to class 0 according to BS 476 Parts 6 & 7.

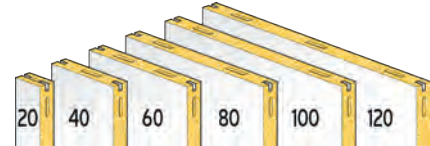

PANEL FINISH


ANTIBACTERIAL PLASTICIZED SHEET METAL

Galvanized sheet steel with antibacterial plastic coating PVC, 120 micron thick



STAINLESS STEEL SHEET

AISI 304 stainless sheet steel, finished with Scotch Brite treatment with protective film


OPTIONS

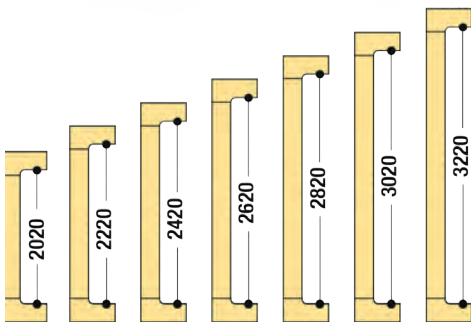


7 Heights

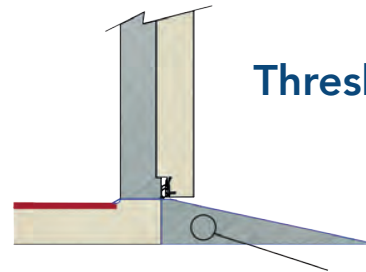

Thresholds

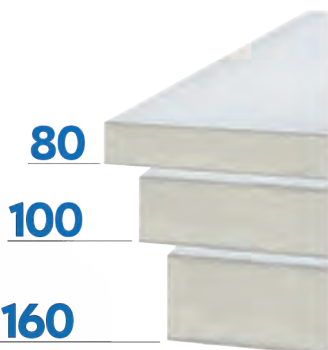


3 Thicknesses




Connection with dual effect cam locks

DOORS

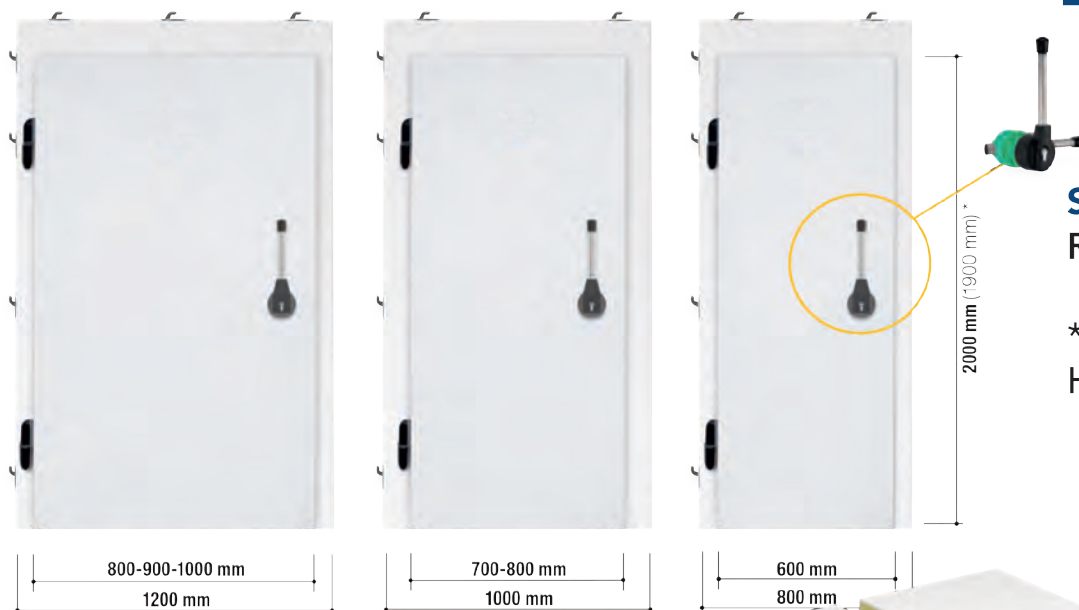

**Standard
Rotation Handle**


*for cold rooms
H = 2000mm

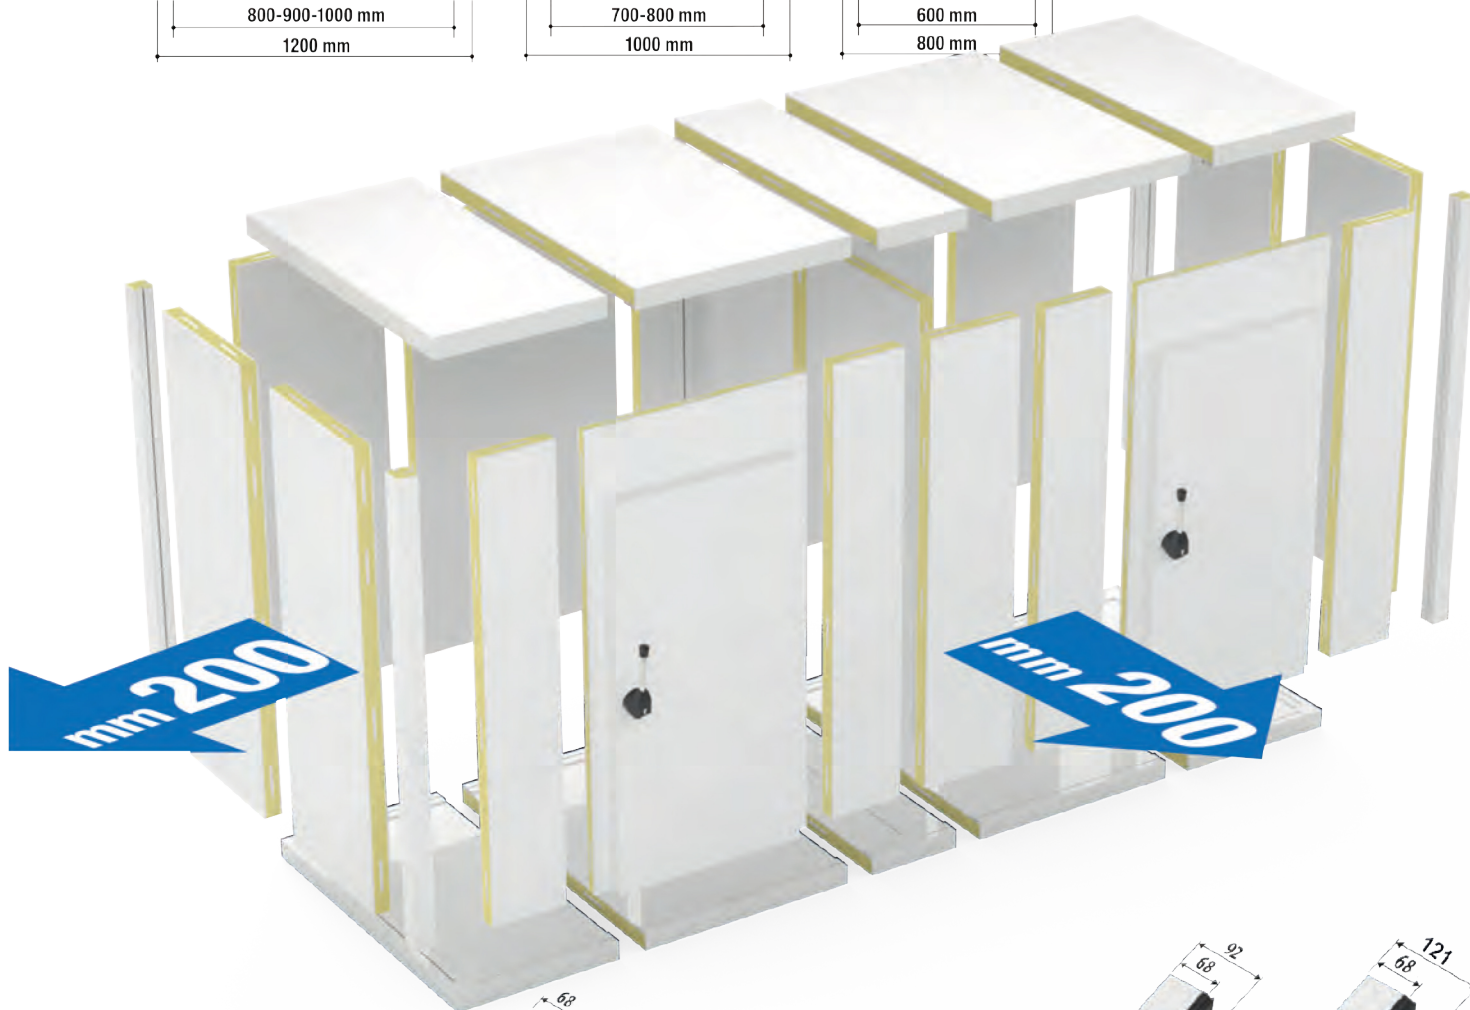

Monolithic Door




**Half-Recessed
Monolithic Door**

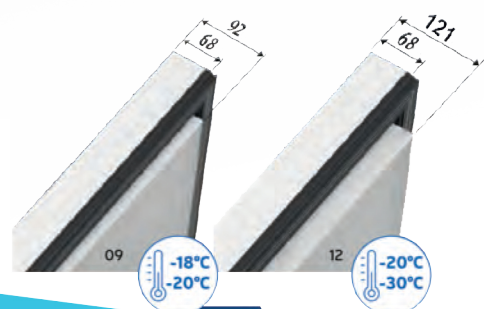



MODULAR COLD ROOMS • FEATURES



MODULARITY

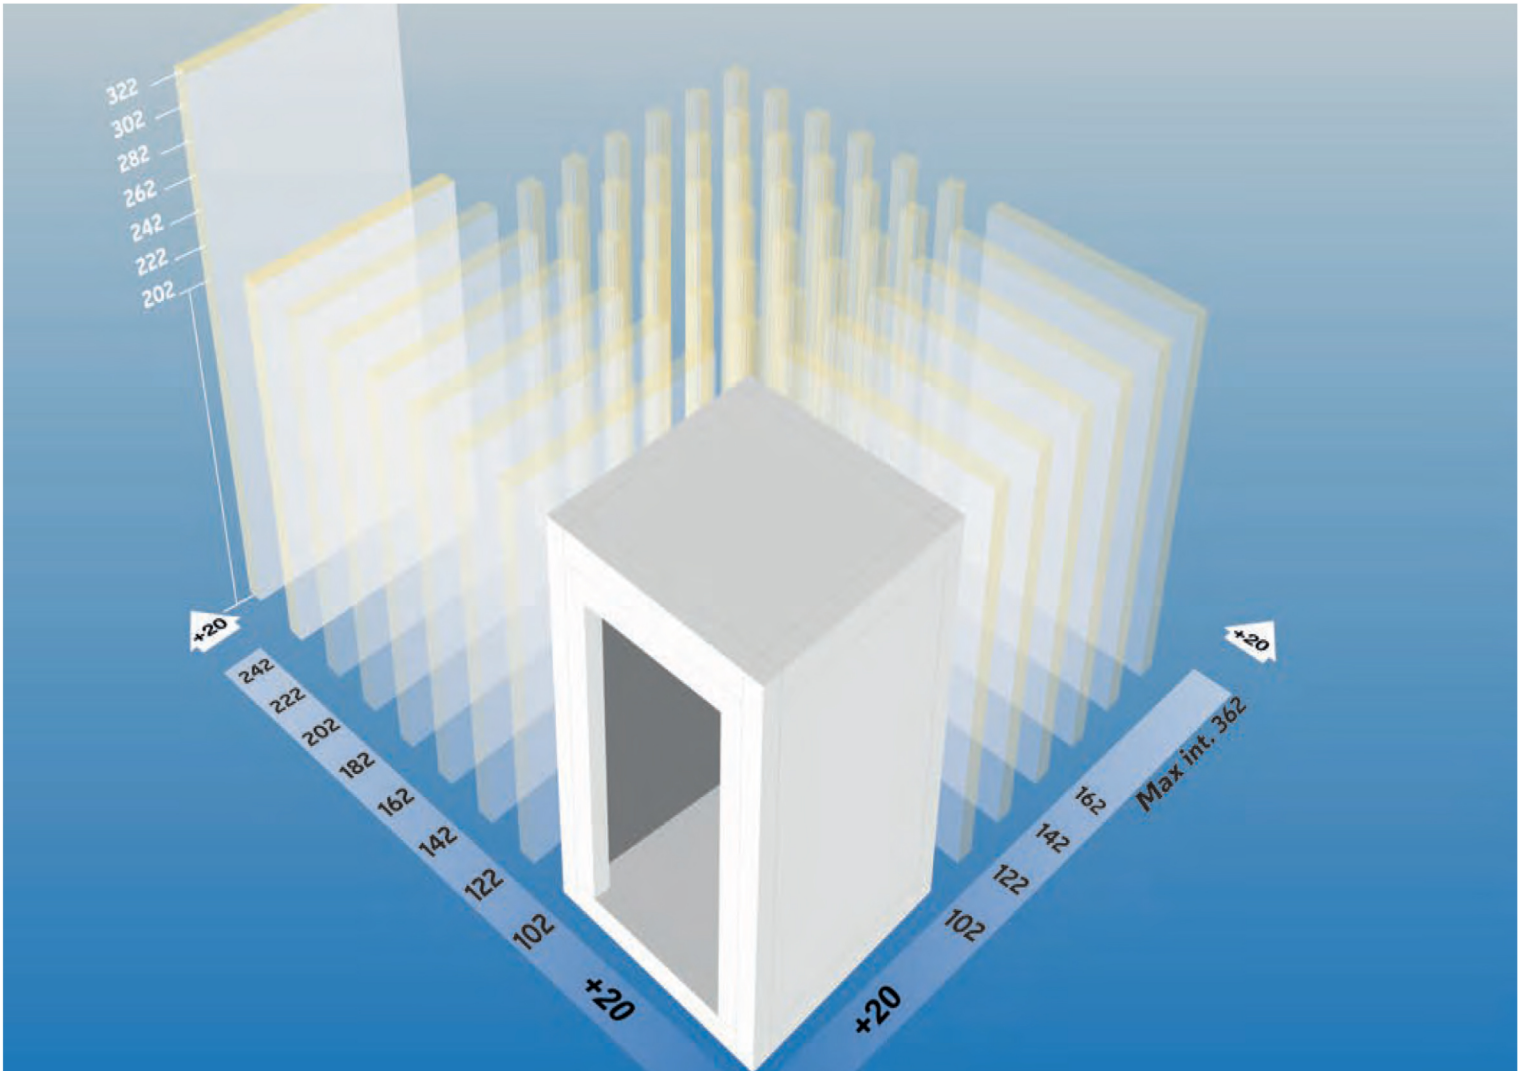

FLOOR

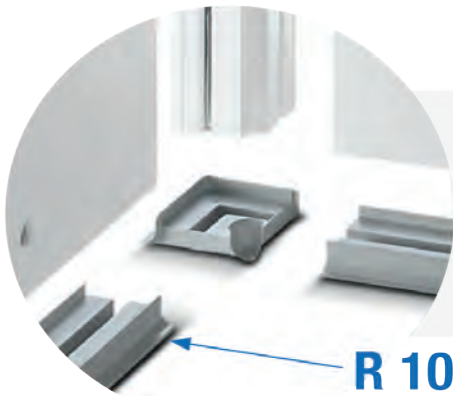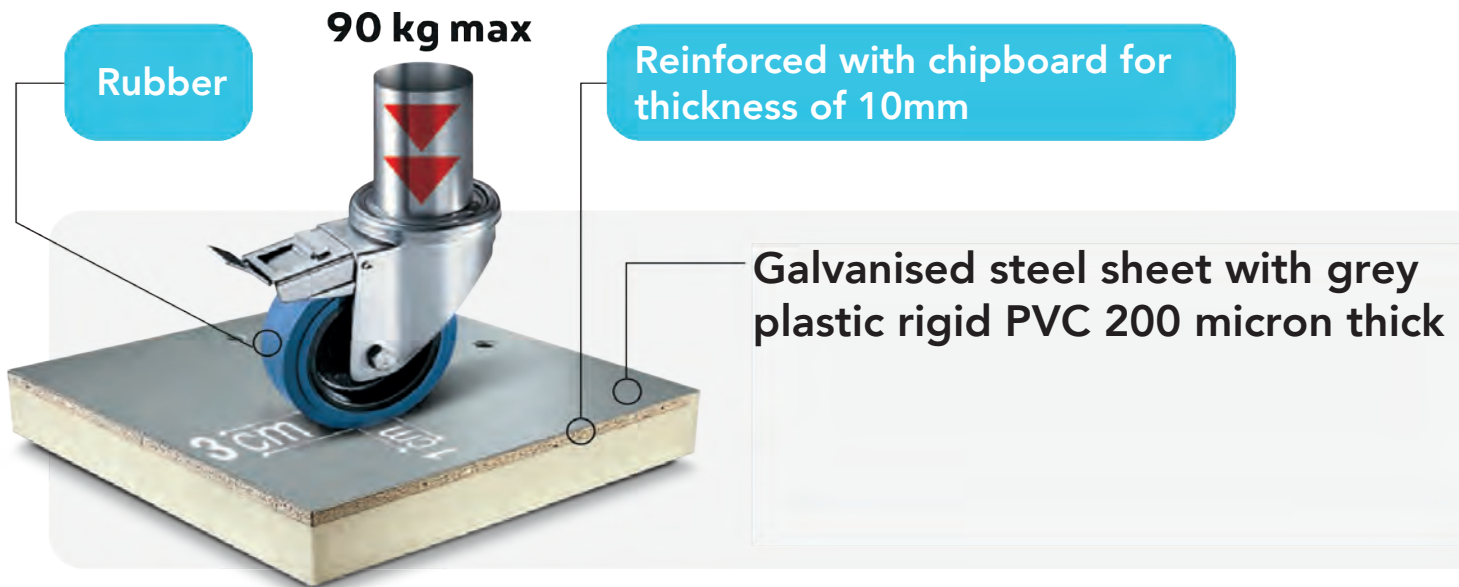


Cold Rooms without Floors



P 90 IX

AISI 304 stainless steel
Non-slip with R12 certificate

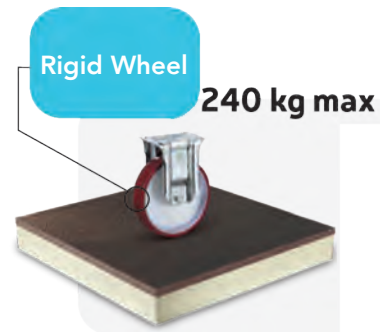

P 240 F

Stratified molded phenol integrated into polyurethane foam. Maximum load 240kg per rigid wheel



MODULAR CASES • FEATURES



Option




Half recessed doors

80 mm



Single thickness
for NT and LT

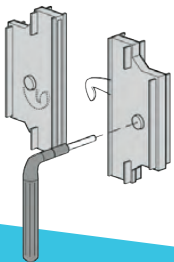

Connection with
dual effect camlocks

MODULAR CASES • FEATURES

Modular sectional cases and cabinets, high insulation performance, suitable for both positive and negative temperatures.

Walls, ceiling and floor in prepainted sheet RAL 9010, injected polyurethane insulation, expanded with HFO

ISO 80mm

Module: 800mm

H internal: 2020 - 2220 - 2420mm

Reaction to fire B s3 d0 standard



OPTION
Adjustable Legs



DOORS

610mm x 1700mm net opening

HALF DOORS

610mm x 800mm net opening

For an easy insertion on special runners of wire shelves
60cm x 80cm or pastry trays 60cm x 40cm




Floors and ceilings
with rounded
integrated radius



Rounded R10 internal
corners in grey PVC

DIMENSIONS

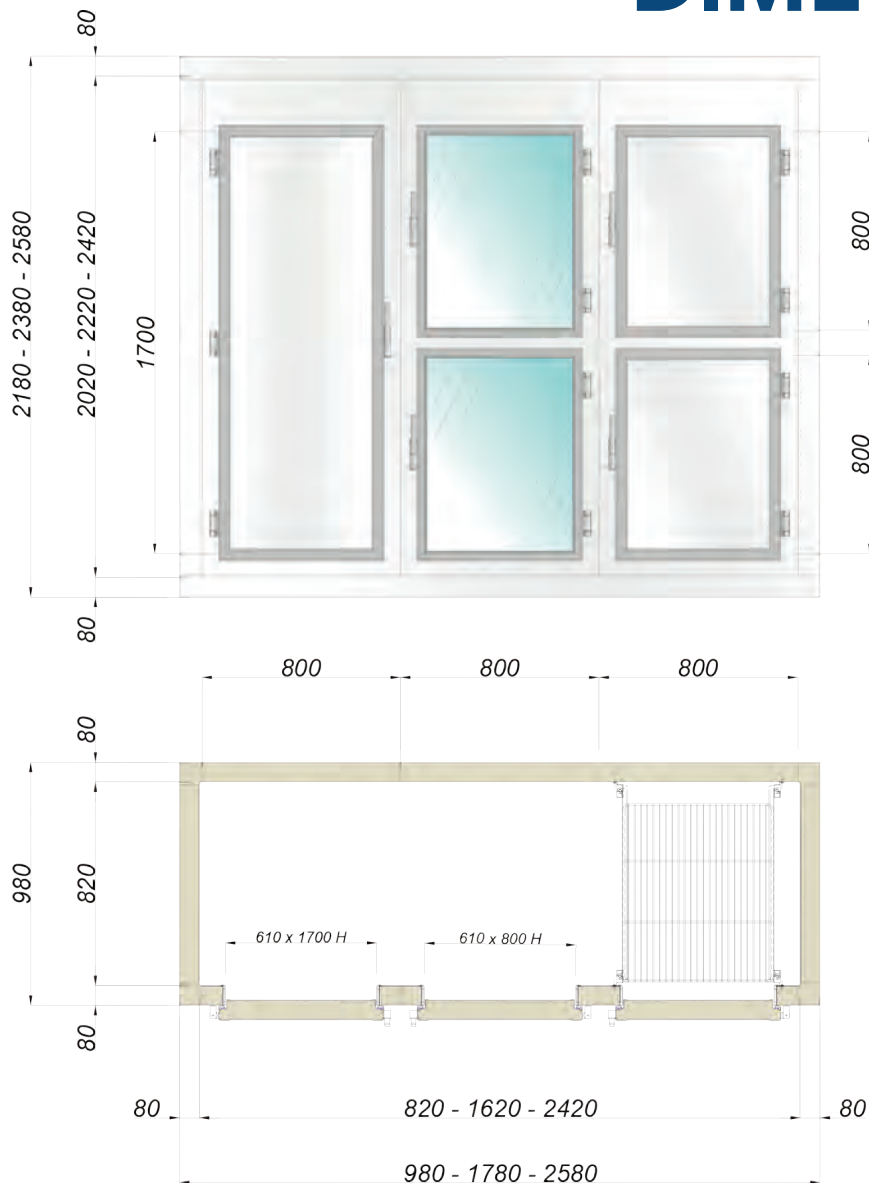

PANEL FINISH

ANTIBACTERIAL PLASTICIZED SHEET METAL

Galvanized sheet steel with antibacterial plastic coating PVC, 120 micron thick

STAINLESS STEEL SHEET

AISI 304 stainless sheet steel, finished with Scotch-Brite treatment with protective film



MODULAR CASES • OPTIONS



60 x 80 cm

Removable internal grills

In galvanised chrome-plated steel placed at 35mm height steps



Solid and glass doors

Glass doors available for positive temperatures only



Solid half doors and glazed half doors

Glazed available for positive temperatures only



Adjustable stainless steel legs

To support cabinet



Internal lighting



Ceiling refrigeration units


For negative and positive temperatures

SHELVING SYSTEMS



MULTIPURPOSE MODULAR SHELVING
Flexible with superior strength & hygiene
Fully adjustable, quick & easy assembly

HYGIENIC WIRE SHELVING
Corrosion resistant with
antibacterial protection
Fully adjustable, open wire design

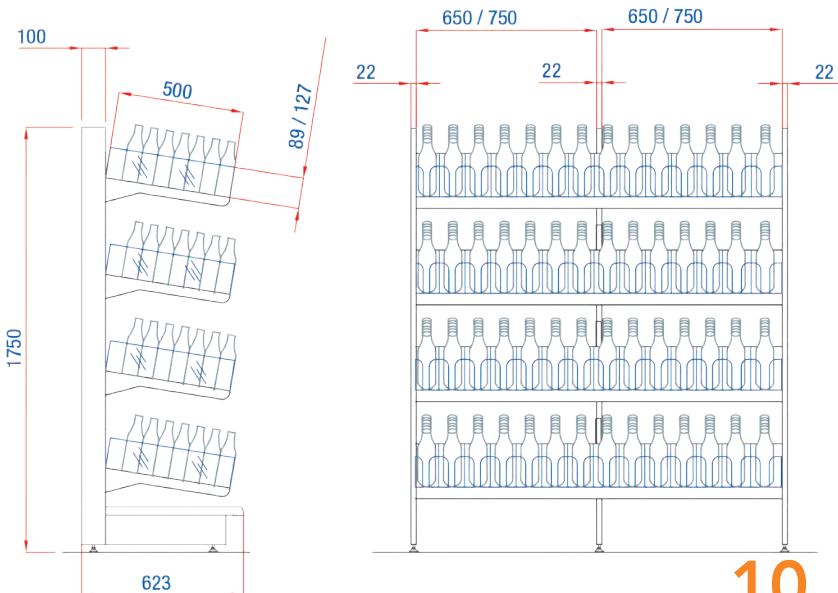

DRINK RACK
Drink shelving system

CURTAIN SYSTEMS

PVC STRIP CURTAINS



INSULATED CURTAINS



Energy saving



Thermal insulation



Reduction of condensation

THERMAL GLASS



MOD. AD 70

Insulated windows, featuring a PVC heat sealed frame



MOD. ALU

Thermal glass with anodised aluminium frame and single chamber glass



MOD. FILO ALU 2C

Thermal window flush with the wall of the cold room - aluminium frame

CEILING LIGHT LED



Durable & Waterproof

20 W

1600 Lm

230 V 50 HZ

REFRIGERATION



SADDLE PACKAGE UNITS For
For positive and negative
temperatures



PLUG-IN PACKAGED UNITS
For positive and negative
temperatures



PACKAGED UNITS
For ceiling mounted installation
For positive and negative
temperatures